

1 × 2 HDMI 18Gbps Splitter

User Manual

VER 1.0

Thank you for purchasing this product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge protection device recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Table of Contents

1. Introduction	3
2. Features	3
3. Package Contents	3
4. Specifications	4
5. Operation Controls and Functions	5
6. Application Example	6

1. Introduction

1x2 HDMI 18Gbps Splitter is an advanced solution for splitting a HDMI content to 2 HDMI outputs synchronously. It provides high performance audio and video up to 4K2K@60Hz (4:4:4) and is capable of receiving, retiming and transmitting up to 18Gbps of bandwidth with no data loss.

2. Features

- ☆ HDMI 2.0b, HDCP 2.2 compliant
- ☆ Up to 4K2K@60Hz with 24bit RGB/YCBCR 4:4:4
- ☆ VESA format up to QSXGA@60Hz
- ☆ Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
- ☆ Built-in equalizer, retiming and driver
- ☆ Smart EDID, STD(1080p) mode and TV(copy OUT1) mode
- ☆ Compact design for an easy and flexible installation


3. Package Contents

- ① 1× 1x2 HDMI 18Gbps Splitter
- ② 1× 5V/1A Power Adapter
- ③ 1× User Manual

4. Specifications

Technical	
Video Bandwidth	600MHz/18Gbps
Input Ports	1xHDMI Type A[19-pin female]
Output Ports	2xHDMI Type A[19-pin female]
Video Resolutions	480i ~1080p50/60, 4Kx2K@24/30, 4k2k@60Hz
ESD Protection	Human body model — ±8kV (air-gap discharge) & ±4kV (contact discharge)
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	56mm (W) × 100mm (D) × 16mm (H)
Weight	165g
Power Supply	Input: AC100 - 240V 50/60Hz Output: DC 5V/1A (US/EU standards, CE/FCC/UL certified)
Power Consumption	2W (Max)
Operation Temperature	32 - 104°F / 0 - 40°C
Storage temperature	-4 - 140°F / -20 - 60°C
Relative Humidity	20 - 90% RH (no condensation)

5. Operation Controls and Functions

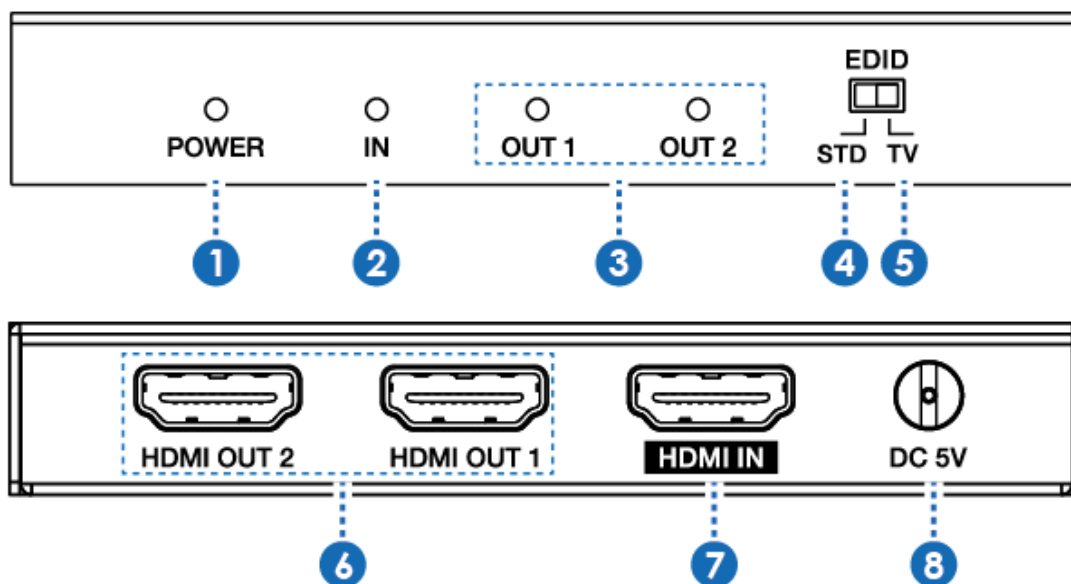

Number	Name	Function description
1	POWER LED	This blue LED illuminate when the device is connected with power supply.
2	IN LED	This blue LED illuminate when the Source connected to the device.
3	OUT LED	These blue LEDs will light up to indicate which HDMI outputs are connected to an active TV/ display/monitor.
4	EDID STD	When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo.
5	EDID TV	When in 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1.
6	HDMI OUT 1~2	Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another transmitter to extend the operating distance.
7	HDMI IN	Connect the input port to the HDMI output of your

		source device such as a DVD player or set-top box with an HDMI cable.output of your source device such as a DVD player or set-top box with an HDMI cable.
8	DC 5V	Plug the 5V DC power supply into the unit and connected the adapter to an AC outlet.

6. Application Example

